

# ZEROMUR door-casing

## ZEROMUR door-casing

Zeromur means esthetics – modern and minimalist design

- door-casing can reach as far as the ceiling and it can serve for many years thanks to its exceptional stiffness, stable and resistant construction
- it gives the possibility of hiding or displaying the door
- door-casing made of aluminum is moisture-proof
- high acoustics
- hinges used in door-casing are regulated in three levels and it makes it possible to open the door leaves up to 180°
- special system of fixing to the wall together with special nets prevent from cracking on connections with the wall
- dedicated to door leaves of 50 mm thickness
- easy to assemble

### FINISHING:


- raw aluminium
- anode
- RAL spectrum of colours

## TECHNICAL PARAMETERS


THE TABLES BELOW SHOW AVAILABLE HEIGHTS

### DOOR-TO-WALL FLASHING – OPENING TOWARDS THE INSIDE

| Standard height<br>Cm | Height of door<br>frame inside<br>Ah | Total door frame<br>height<br>Bh | Hole in the wall<br>ch |
|-----------------------|--------------------------------------|----------------------------------|------------------------|
| <b>S – 206</b>        | 206                                  | 210,4                            | 212                    |
| <b>M – 220</b>        | 220                                  | 224,4                            | 226                    |
| <b>L – 240</b>        | 240                                  | 244,4                            | 246                    |
| <b>XL – 260</b>       | 260                                  | 264,4                            | 266                    |
| <b>XXL – 270</b>      | 270                                  | 274,4                            | 276                    |

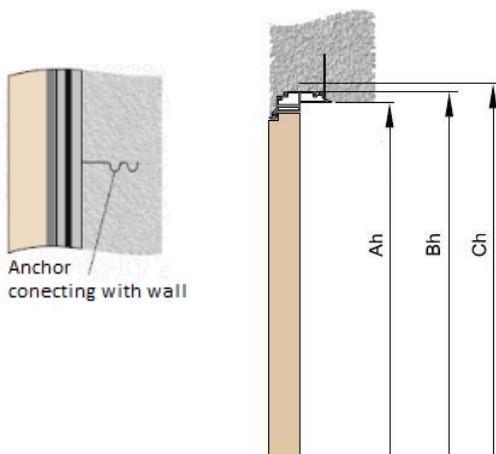



Frame for door  
**OPENING**  
**TOWARDS THE**  
**INSIDE RIGHT**

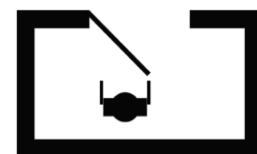


Frame for door  
**OPENING**  
**TOWARDS THE**  
**INSIDE LEFT**

## DOOR-TO-WALL FLASHING – OPENING TOWARDS THE OUTSIDE.

| Standard height<br>Cm | Height of door frame<br>inside<br>Ah | Total door frame<br>height<br>Bh | Hole in the wall<br>ch |
|-----------------------|--------------------------------------|----------------------------------|------------------------|
| <b>S – 206</b>        | 204,8                                | 209,2                            | 211                    |
| <b>M – 220</b>        | 218,8                                | 223,2                            | 225                    |
| <b>L – 240</b>        | 238,8                                | 243,2                            | 245                    |
| <b>XL – 260</b>       | 258,8                                | 263,2                            | 265                    |
| <b>XXL – 270</b>      | 268,8                                | 273,2                            | 275                    |

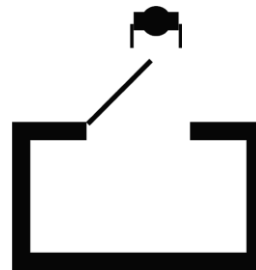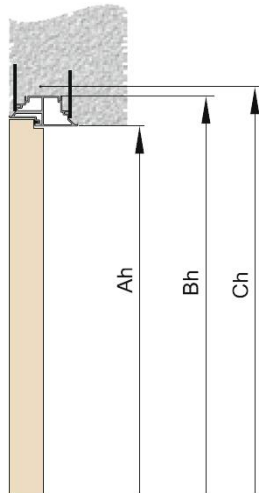


Frame for door  
**OPENING TOWARDS  
THE OUTSIDE RIGHT**

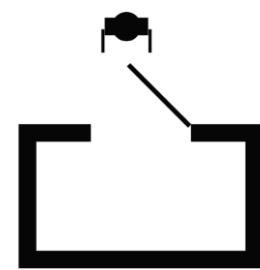

Frame for door  
**OPENING TOWARDS  
THE OUTSIDE LEFT**

## TABLE PRESENTING AVAILABLE WIDTHS

| Standard width<br>cm | Width of door<br>frame inside<br>As | Total door frame<br>width<br>Bs | Hole in the wall<br>cs |
|----------------------|-------------------------------------|---------------------------------|------------------------|
| <b>70</b>            | 70                                  | 78,7                            | 82                     |
| <b>80</b>            | 80                                  | 88,7                            | 92                     |
| <b>90</b>            | 90                                  | 98,7                            | 102                    |
| <b>100</b>           | 100                                 | 108,7                           | 112                    |

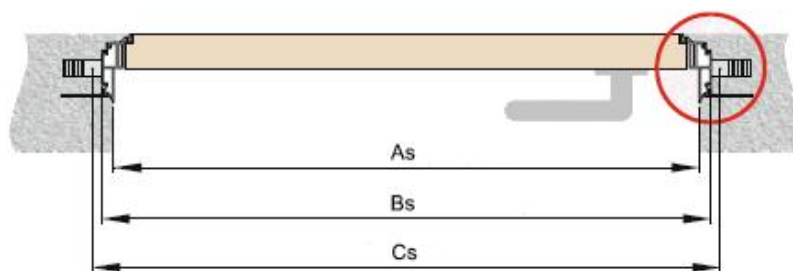

\* There is an option to order a door of non-standard measurements: height up to 300 cm, width up to 120 cm, according to individual assessment.